



# 4000 Turnstiles



## PRODUCT SPECIFICATION

**Flow Rate**  
15 to 22 Person Per Minute in Single Direction  
Fail Safe or Fail Secure Modes Available

**Duty Cycle**  
100% Heavy Industrial Usage  
Suitable for Indoor & Outdoor Usage

**Specification**  
CE Approved, TUV Approved

**Power Requirements**  
Single Phase 240v 50Hz 5 Amps

**Colours**  
All RAL Colours Available  
(Galvanised Optional Cost)

**Dimensions**  
Single: 1280mm x 1400mm x 1790mm  
Double: 2450mm x 1400mm x 1790mm

**Sizes**  
Rotor: 76mm Tube with Bottom Supported Bearing  
Arms: 42mm Tube with Capped Ends  
Side Frames: 33mm Tube Welded to Curve Base Plate

**Material Construction**  
Mild Steel Primed & Powder coated as standard Galv  
Optional


**Unit Weight**  
230Kg Approx

\*All turnstiles are bespoke and manufactured to order.

CAD Drawings  
provided as  
standard



Tech Support  
provided and FREE  
mobile APP as  
standard

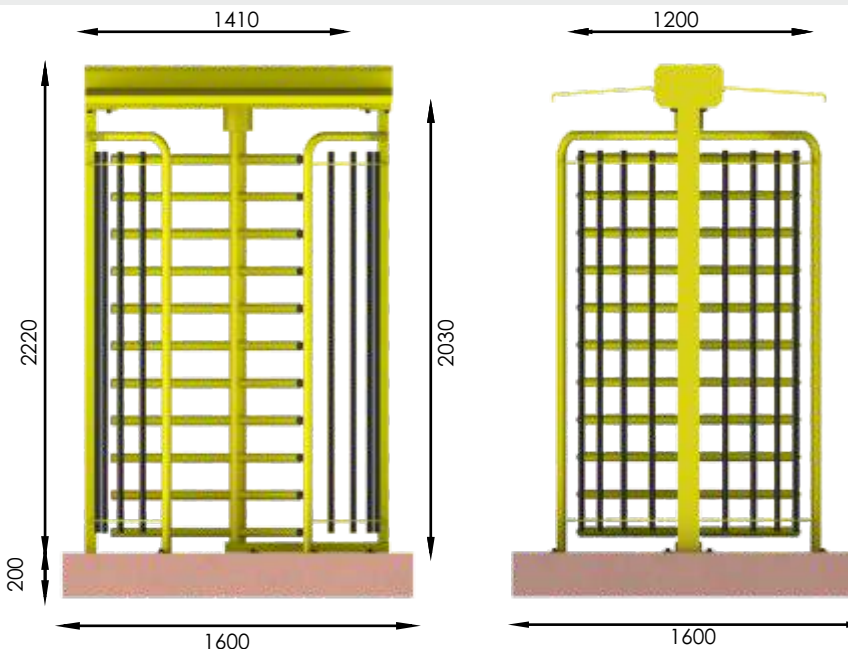

Delivered on our Fleet  
of Hi-Ab Vehicles, ready to  
bolt down/ connect power  
and commission.